



Thermia Robust Eco



Robust Eco

Thermia Robust Eco

Robust Eco

22 42

336




A+++
A++



Robust Eco

- 1 ()
- 2 -
- 3 hot-gas
- 4 hot-gas
- 5 -
- 6 ()
- 7 ,
- 8 ,

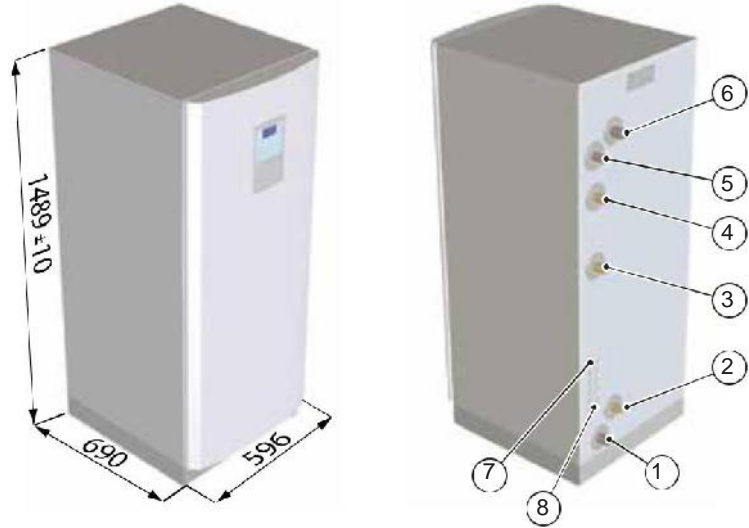

Robust Eco		22	26	33	42
		R410A	R410A	R410A	R410A
	kg	3.8	3.9	4.5	4.6
	MPa	4.5	4.5	4.5	4.5
	MPa	4.3	4.3	4.3	4.3
		Scroll	Scroll	Scroll	Scroll
	Oil	POE	POE	POE	POE
3-N	Volt	400	400	400	400
	kW	9.91	12.40	14.83	19.12
	kW	0.5	0.5	0.6	0.6
	A	21.7	23.8	32.2	37.1
	A	20	25	32	32
	COP ¹	4.40	4.40	4.37	4.31
	kW	21.9	25.4	33.5	41.4
	kW	5.0	5.8	7.7	9.6
	/	1.4	1.5	2.1	2.4
	/	0.5	0.6	0.8	0.9
Max	bar	6	6	6	6
	bar	6	6	6	6
Min/max	°C	20/-10	20/-10	20/-10	20/-10
	°C	65/20	65/20	65/20	65/20
	dB (A)	<55.0	<55.2	<56.4	<56.0
		+ -17°C ± 2			
	kg	244	260	281	290

1) B0/W35,

EN14511 incl. circ.pump.

10K,

4)

0°

2)

3K.

3)

5) B0/W35,

ISO 3741.