



Thermia Solid Eco




Solid Eco

Thermia Solid Eco

Thermia Solid Eco

Solid Eco

Thermia Online,





A+++
A++



Solid Eco

- 1 ()
- 2 -
- 3 hot-gas
- 4 hot-gas
- 5 -
- 6 ()
- 7
- 8

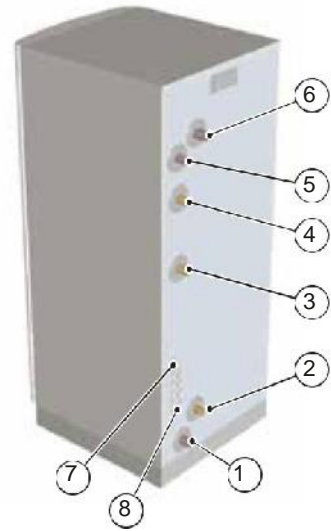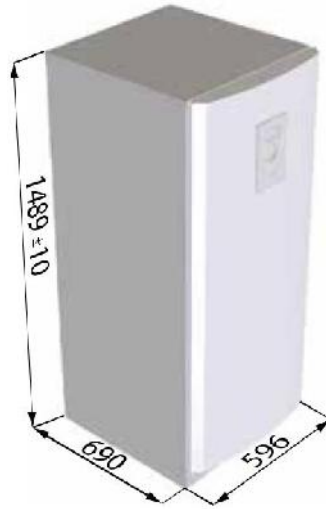

Solid Eco		22	26	33	42
		R410A	R410A	R410A	R410A
	kg	3.8	3.9	4.5	4.6
	MPa	4.5	4.5	4.5	4.5
	MPa	4.3	4.3	4.3	4.3
		Scroll	Scroll	Scroll	Scroll
	Oil	POE	POE	POE	POE
3-N	Volt	400	400	400	400
	kW	9.91	12.40	14.83	19.12
	kW	0.5	0.5	0.6	0.6
	A	21.7	23.8	32.2	37.1
	A	20	25	32	32
	COP ¹	4.40	4.40	4.37	4.31
	kW	21.9	25.4	33.5	41.4
	kW	5.0	5.8	7.7	9.6
	/	1.4	1.5	2.1	2.4
	/	0.5	0.6	0.8	0.9
Min/max	°C	20/-10	20/-10	20/-10	20/-10
	°C	65/20	65/20	65/20	65/20
	dB (A)	<55.0	<55.2	<56.4	<56.0
			+ -17°C ± 2 ³		
	kg	225	241	262	271

1) B0/W35, EN14511 incl. circ.pump.
 2) 3K, 10K, 4) 0°
 3) 3K, 5) B0/W35, ISO 3741.